

SCOPE OF DELIVERY

FINECOAT 9900 PLUS SPRAYPACK - DPFC	276048
FC gun; pressure cup 1 litre; incl. nozzle set no. 4	0277035B
Air hose cpl., for FC 9900 Plus	277236



INNOVATION SINCE 1947

Perfect surfaces and added value are our passion. Bringing colour, protection and function to surfaces is our mission. We dedicate all of our technical expertise to your objects and products, and support you with personal service. Using innovative technologies and highly efficient, reliable and user-friendly solutions, we are constantly setting new standards in surface technology.




wagner-group.com/3plus2

ADVANTAGES OF LOW PRESSURE SPRAYING

With the low-pressure air technique the paint material is atomised using large quantities of air, which are at a low pressure (up to 0.7 bar) compared to high pressure air spraying. Water based paints and lacquers with a high solids content, which are increasingly being used, are powerfully applied thanks to the 5-stage turbine.

With the high working speed of the FineCoat 9900 Plus, even major painting jobs can be done quickly and efficiently. The minimal overspray with the low pressure air technique also allows environmentally friendly and economical spraying.

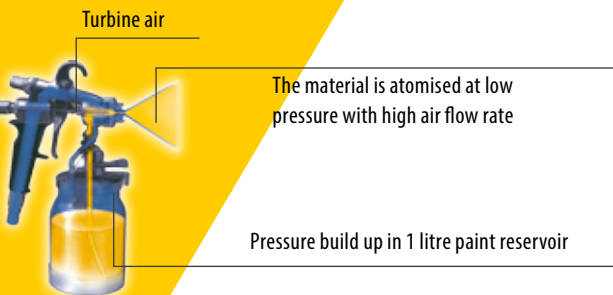

Anyone purchasing a WAGNER paint spraying unit automatically receives a three-year manufacturer's warranty. But we can do more: If you register online, you can extend this warranty for a further two years, free of charge!

HVLP - HIGH VOLUME, LOW PRESSURE

PARTICULARLY POWERFUL AND FLEXIBLE:

In low-pressure spraying, the atomising air generated in the turbine flows through an air hose to the paint container on the spray gun, where it then builds up pressure. This delivers the coating material through the material tube to the nozzle and atomises it with the remaining air. The HVLP sprayers from WAGNER deliver an especially high air volume and thus optimum atomisation.

WELL-EQUIPPED FOR DAILY USE ON CONSTRUCTION SITES:

The modular system consisting of a turbine and various spray attachments enables the application of wood stains, varnishes and lacquers through to emulsions with professional quality. They are perfect when starting to use spray equipment or to add to the range of devices available on site.

OPTIMAL ADAPTATION POSSIBILITIES:

The air and material volumes can be adjusted by dials directly on the gun allowing quick adjustment to different objects.

APPLICATION HVLP - XVLP

Lacquers	Enamels		Emulsions
	standard	high-viscosity	
HVLP			



More about technology:
wagner-group.com/technologies

QUICK HELP



wagner-group.com/tips-tricks

ACCESSORIES

GUNS AND NOZZLES

Flocking gun WF-20, 20 mm, for the application of dry chips to a wet undercoat	0261025
FC gun; pressure cup 1 litre; incl. nozzle set no. 4	0279094
Gravity feed cup, for FineCoat Split Gun, 600 ml	0524053
FineCoat Split Gun, suction cup, 1000 ml	0524028
Nozzle set, for FineCoat, different sizes	276XXX
Nozzle set, for FineCoat Split Gun, different sizes	529XXX
FC radiator extension nozzle RN30, only for FC guns	261020
Nozzle for WSL 50/60, different sizes	26146X

HOSES

Hose pack, consisting of material and air hose DN10, 8.2 m, for FC turbines	261255
Hose whip, 152 cm, for FineCoat	0524405A
Air hose cpl., for FC 9900 Plus	277236

OTHERS

Filter kit, for FC 9900 / 9800	0279938
Air cap, d = 09 mm, RD45	0261460
Air cap, d = 12 mm, RD45	0261461
Air cap, d = 14,5 mm; RD45	0261462



FINECOAT 9900 Plus

BE UNSTOPPABLE!

wagner-group.com/contractor

J. Wagner GmbH | Otto-Lillienthal-Strasse 18 | D-88677 Markdorf
Phone: +49 (0) 7544 / 505-1666 | Mail: info@wagner-group.com | wagner-group.com

Subject to changes · EN · 9122983 · 2020

FINECOAT 9900 Plus

Weight	10 kg
Motor output	1,5 kW
Voltage	230 V / 50 Hz
Max. operating pressure	0,72 bar, 0,072 MPa
Technology	Turbine
Article number	276048



More about FineCoat 9900 Plus online:
wagner-group.com/fc9900plus

Precise adjustment of the spray jet directly on the gun. This way the jet can be set precisely to the particular object to be coated.


In a single operation the air flow rate and the material flow rate can be regulated directly on the gun.

Ergonomic gun build. The gun lies comfortably in the hand and is effort saving.

Quick-release coupling with integral swivel joint for quick connection of the gun to the air hose.

Practical holder for the gun. During breaks in work and when transporting, the gun can be safely stored on the unit.

Quick cleaning of the filter. Take out the filter without tools, just briefly knock out or blow out and refit. Dirty filter warning light indicates if the filter has to be cleaned.

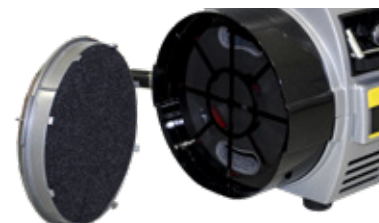

Ultra-powerful thanks to the 5-stage turbine.



FC 9900 PLUS - LEISTUNGSSTARKER LACKSPEZIALIST

PERMITS PRECISE ADAPTATION TO THE OBJECT TO BE PAINTED:
provides an unmistakably fine spray pattern, even with water-based materials.

WIDE RANGE OF APPLICATIONS BOTH INDOORS AND OUTDOORS:
All water thinned and solvent based materials can be applied undiluted, or if required adjusted to spraying viscosity: primers, impregnation agents, stains, lacquers, clear lacquers, coloured lacquers, rust proofing paints, radiator paints, textured paints, hammer finish, multi-coloured effects and many more.

BUILT IN TOOL BOX:
for needles, nozzles, air caps and nozzle wrench.

DUAL AIR FILTRATION:
one on the cooling side and another one on the atomizing side with an automotive type air filter with pre filter.

COMPACT AND EASY TO USE

RECOMMENDED USE

MATERIALS:

Water and solvent-based lacquers, lacquer paints, oils, separating agents

Primers, fillers

Synthetic resin varnishes, PVC lacquers, 2K lacquers

OBJECT SIZE:



For different project sizes



SPRAYGUIDES

This is where you'll find answers about how to set up your device to suit the material and which paints and lacquers give the best spray results with your WAGNER model.
sprayguide.wagner-group.com

